



OPERATING INSTRUCTIONS

SCP, SCPXU Select-A-Charge Programmable Battery Chargers

INTRODUCTION:

Programmable to charge all battery types. Deep cycle, starting, gel, and AGM.

SOME APPLICATIONS:

Golf cars, personnel carriers, floor scrubbers, pallet trucks, lift trucks, electric vehicles.

IMPORTANT: DO NOT USE THIS CHARGER UNTIL YOU HAVE READ ALL THE INSTRUCTIONS.

INITIAL INSTALLATION:

Before making AC connections, refer to the AC requirements labeled on the charger. If your charger is not equipped with an AC plug (*a 220 volt model*) have a qualified electrician install one.

⚠ CAUTION: To reduce the risk of fire protect all circuits with (circuit breaker or fuse), in accordance with the National Electric Code, ANSI/NFPA 70, and all local codes and ordinances. Consult data label on charger to determine AC requirements. Size the branch circuit accordingly.

GROUNDING INSTRUCTIONS:

This battery charger must be grounded to reduce the risk of electric shock. If the charger is equipped with a grounding type plug, it must be plugged into a nominal 117 volt, 60 Hertz circuit. If the charger is supplied with no plug, have a qualified service person install one.

⚠ WARNING: Improper connection of the equipment grounding conductor can result in risk of an electric shock. **DO NOT USE THIS CHARGER ON A TWO POLE UNGROUNDED OUTLET OR ATTEMPT TO BREAK OFF THE GROUND PRONG FOR USE ON A RECEPTACLE OR EXTENSION CORD NOT HAVING A GROUND.**

The use of an extension cord with this charger should be avoided. The use of an improper extension cord could result in a risk of a fire or electric shock. If an extension cord must be used, make sure it is in good condition. Use a three conductor cord no smaller than 14 AWG. And keep it as short as possible. Locate all cords so that they will not be stepped on, tripped over, or otherwise subjected to damage or stress.

Do not operate this charger if it shows any signs of physical damage.

PROPER CARE AND USE OF BATTERIES:

⚠ CAUTION: Always wear protective eye shields and clothing when working with batteries. Batteries contain acids which can cause bodily harm. Do not put wrenches or other metal objects across the battery terminal or battery top. Arcing or explosion of the battery can result. Do not wear jewelry when working around batteries. Arcing can cause severe burns.

New deep cycle batteries will not deliver their full performance until after several cycles.

The tops of the batteries and battery hold downs must be kept clean and dry at all times to prevent excessive self discharge and flow of current between the battery post and frame.

Maintain the proper electrolyte level by adding water when necessary. Never allow the electrolyte level to fall below the top of the battery plates. Electrolyte levels fall during discharge and rise during charging. Therefore, to prevent the overflow of electrolyte when charging, add water **ONLY AFTER** the batteries have been fully charged **DO NOT OVERFILL**. Old batteries require more frequent additions of water than do new batteries.


Do not over discharge the batteries. Excessive discharge can cause polarity reversal of individual cells resulting in complete battery failure.

Provide adequate ventilation for the batteries and charger. Do not obstruct the flow of cooling air around the charger. Provide at least 1" of space around charger. Do not allow clothing, blankets or other material to cover the charger.

⚠ WARNING: Chargers can ignite flammable materials and vapors. Do not use near fuels, grain, dust, solvents, or other flammable's.


⚠ CAUTION: Before connecting the charger to the batteries, make sure the battery pack is of the same voltage rating of the charger. If you are unsure, count the number of cells on the battery pack and multiply by two. This figure should be the same as the DC voltage rating of the charger. (*see ratings label on charger*).

Below is an illustration of Parallel and Series battery packs.

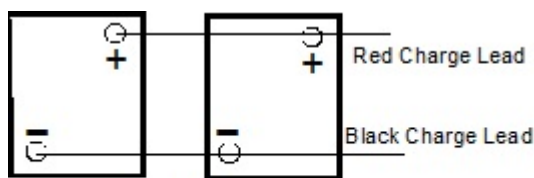

Parallel

When batteries are connected in parallel, the battery amp hour rating is additive, and the voltage remains the same. Example: Two 180 amp hour, 12 volt batteries would equal 12 volts, and 360 amp hours capacity.

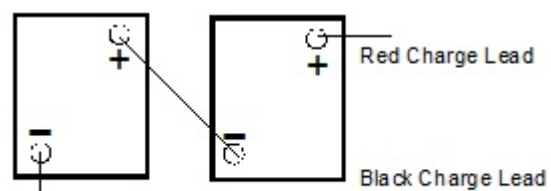

Series

When batteries are connected in series, the voltage is additive, and the amp hour rating remains the same. Example: Two 180 amp hour, 12 volt batteries would equal 24 volts, and 180 amp hours of capacity.

⚠ WARNING: Make sure the DC output leads, clamps, or connector are all in good working condition.

DO NOT USE THIS CHARGER IF:

The DC output clamps, or connector is loose, worn or does not make good contact; The leads are cut or have exposed wires; The DC output leads or connector/clamps feel hot when used.

Using this charger with any of the above symptoms could result in a fire, property damage, or personal injury. Have a qualified service person make the necessary repairs. Repairs should not be made by people who are not qualified.

NORMAL OPERATION:

Before charging, be sure the profile matches your batteries or damage could occur.

F1- Float mode, charges batteries to 2.3 volts per cell before dropping into a continuous low float mode of 2.26 volts per cell. **Ideal for starting or gel batteries.**

F2- Gas and shut off mode. Attempts to charges batteries to 2.58 volts per cell before shut off. Can be set to recycle if battery drops below 2.10 vpc. (see reprogramming section) **Ideal for deep cycle wet batteries.**

F3- Gas and float mode. Attempts to charge batteries to 2.58 volts per cell before dropping into a low float mode of 2.22 volts per cell. **Ideal for wet deep cycle batteries** where a continuous maintenance charge is desirable.

F4- Gas and float mode. Attempts to charge batteries to 2.45 volts per cell before dropping into a low float mode of 2.22 volts per cell. **Ideal for AGM batteries .**

F5- Special program for lithium ion batteries. Not used unless programed at the factory.

- 1). Be sure the ON/OFF switch is in the OFF position, then plug the charger into AC power having the same ratings as that of the charger.
- 2). Connect the clamps to the battery, or plug connector into battery pack.
- 3). Move the ON/OFF switch to the ON position. For 5 seconds the LED will flash red, and the display will indicate the charge profile the charger is set to as shown below.

ATTENTION: On units having a fan, it will run on initial start up. If it doesn't, turn the charger off. **DO NOT USE THE CHARGER IF FAN DOES NOT RUN.** The fan is current controlled and will shut off towards the end of the charge cycle. On units with no fan, it is normal for certain areas of the charger case to become hot when charging.

- 4). After the charger starts, the LED will stay on steady red indicating the battery is below 80% charge, and the display will indicate the percent of the charge cycle. 05% is the normal number for deeply discharged batteries. NOTE: If the LED flashes red/yellow see trouble shooting section. (*The battery voltage button may be pushed anytime the charger is on. For battery packs that exceed 100 volts, the display will read minus the 1.*) As the completion

of the charge cycle increases to 80% the LED will turn yellow and the charger will enter a gassing cycle in all modes except F1. At the end of the cycle, the display will show “CC” charge complete, and the LED will show a flashing or steady green LED.

NOTE: The percent of charge reading will rise unevenly. In other words, the change may be rapid at first but may stall from minutes to hours at certain points during the cycle.

5). To discontinue charging, move switch to the OFF position. Remove clamps from battery or unplug connector.

EQUALIZATION:

When using multiple batteries in series, cells become uneven during charge and discharge cycles. At least once a month perform two charge cycles back to back, this will bring up cells that are lagging behind full charged cells and is important to overall battery performance. NOTE: This need only be done when using **F2**, **F3**, and **F4** settings.

⚠ WARNING: Do not disconnect the DC output clamps or unplug connector from the batteries when the charger is on. The resulting arcing could cause the batteries to explode.

REPROGRAMMING THE CHARGER:

CHARGE PROFILE: With at least one DC lead disconnected from battery, plug into AC power. Push and hold the battery voltage button until the display starts to flash, let off, then press repeatedly until the desired profile is selected. **F1**, **F2**, **F3**, **F4**. Let off button. Wait till display stops flashing and profile is held in memory. Unplug AC power and connect DC leads to battery. Plug in AC power, display shows the new profile before cycle starts.

GASSING / ABSORPTION CYCLE: For deep cycle batteries only. If you are routinely discharging the batteries to 50% or lower, leave at **(d0)** which is the default setting. If you routinely make shallow discharges, and plug the charger in after every use, change to **(d1)** which is a shorter gassing cycle. If your battery performance, or range is poor, most likely the cycle is not long enough, to extend the cycle change to **(d2)**

To reprogram, disconnect leads from battery, plug into AC power. Press the battery voltage button twice, the display shows the current setting. To change, press and hold button until display begins to flash, press again to change. Wait till display stops flashing and profile is held in memory. Connect battery leads and begin cycle.

Recycle time. The charger will only turn itself back on if the profile is set to **F2**, timed shut off. If set to **r0** it will never recycle. If set to **r1** the charger will check the battery once a week, if the battery voltage is below 2.10 volts per cell, the charger will turn on and run a cycle.

To reprogram, disconnect leads from battery. Plug into AC power. Press the battery voltage button three times, the display shows the current setting. To change, press and hold button until display begins to flash, press again to change. Wait till the display stops flashing and profile is held in memory. Connect battery leads and begin cycle.

TROUBLE SHOOTING:

⚠ CAUTION: DO NOT DISASSEMBLE THE CHARGER. Incorrect assembly may result in a risk of electric shock or fire. Contact factory.

⚠ DANGER: To reduce the risk of electric shock, always disconnect both the AC power supply cord and the output leads or connector before attempting any maintenance cleaning.

1). FUSE ON CHARGER OR AC LINE BREAKER BLOWS

The charger may be shorted internally, or charging a battery with a lower voltage rating than the charger will cause an overload, and damage to battery and charger, or the branch circuit breaker is too small for the charger.

2). NO POWER IS PRESENT ACROSS THE DC LEADS WHEN A VOLT METER IS CONNECTED

Good. The charger will not turn on until the clamps are connected to the battery.

3). BATTERIES DON'T RECEIVE FULL CHARGE

- a.) The battery you are charging may be too large for the charger.
- b) If you have the charger plugged into a long extension cord that is too small, a voltage drop will cause a decrease in charger output, extending charge times.
- c) Set the gassing /absorption cycle to **d2**.

4). THE LED FLASHES ALTERNATING RED YELLOW ON START UP

The batteries are over discharged, and the charger is pulse charging the batteries until the volts per cell reaches approx. 1.6, then the LED will turn solid red and the display will start at 06. It may take several hours for the voltage to rise high enough so the charger will turn full on.

5). THE LED FLASHES ALTERNATING GREEN RED

The charger is connected reverse polarity to battery, or there is a break or intermittent connection in the DC cabling/connectors, or the battery voltage is near zero. Use a jumper battery to raise the voltage, or charge one or more of the batteries individually.

6). THE DISPLAY READS "Er" AND YELLOW/GREEN LED

The batteries failed to reach timer trip point, and the bulk timer timed out. Reasons for this can be the battery is too big for the charger, a defective battery, low line voltage to charger, or battery thermal runaway.

7). THE DISPLAY READS "Er" AND GREEN LED

The batteries failed to reach 2.45 volts per cell, and the bulk timer timed out. Reasons for this can be the battery is too big for the charger, a defective battery, or battery thermal runaway.

QUICK CHARGE SCP Battery Chargers
“LIMITED WARRANTY”

Quick Charge corporation warrants the SCP line of chargers for three (3) years from the date of purchase.

After the warranty period, chargers returned to the factory for repair will be charged a minimum rate of \$25.00. Charger will be returned, freight and repair charges, C.O.D. unless other arrangements have been made

This warranty covers all defects in manufacture and performance, provided the unit is operated in compliance with manufacture's operating instructions.

For repairs to be made at the Quick Charge factory, a charger and/or component(s) should be sent, freight prepaid to Quick Charge at::

Quick Charge Corp.
1032 S.W. 22nd St.
Oklahoma City, OK. 73109

Quick Charge, will at it's option, repair or replace the charger or component in question. The repaired item will then be returned, freight prepaid by Quick Charge. This warranty is void if the charger or component have been altered, changed, or repaired by anyone not authorized by Quick Charge, or if the charger or component, have been subjected to misuse, negligence, or harsh environmental conditions. (Except those chargers designed for such conditions)

If returning the charger to the factory is not practical, replacement parts may be shipped to the customer for field repair at no charge. On parts such as circuit boards, the customer will be required to return the board suspected to be defective to Quick Charge, freight prepaid. If such defective parts are not returned, the customer will be invoiced for the repair parts.

Field repairs are made at the user's own risk. "Authorization" by Quick Charge to repair refers to maintaining the warranty only. Quick Charge assumes no responsibility or liability for field servicing, and shall not be responsible for incurred travel or labor charges.

Quick Charge corporation shall not in any event be liable for the cost of any special, indirect or consequential damages to anyone, product or thing.

This warranty is in lieu of all other warranties expressed or implied. Quick Charge neither assumes nor authorizes any representative or other person to assume for us any liability in connection with the sale of this product.